

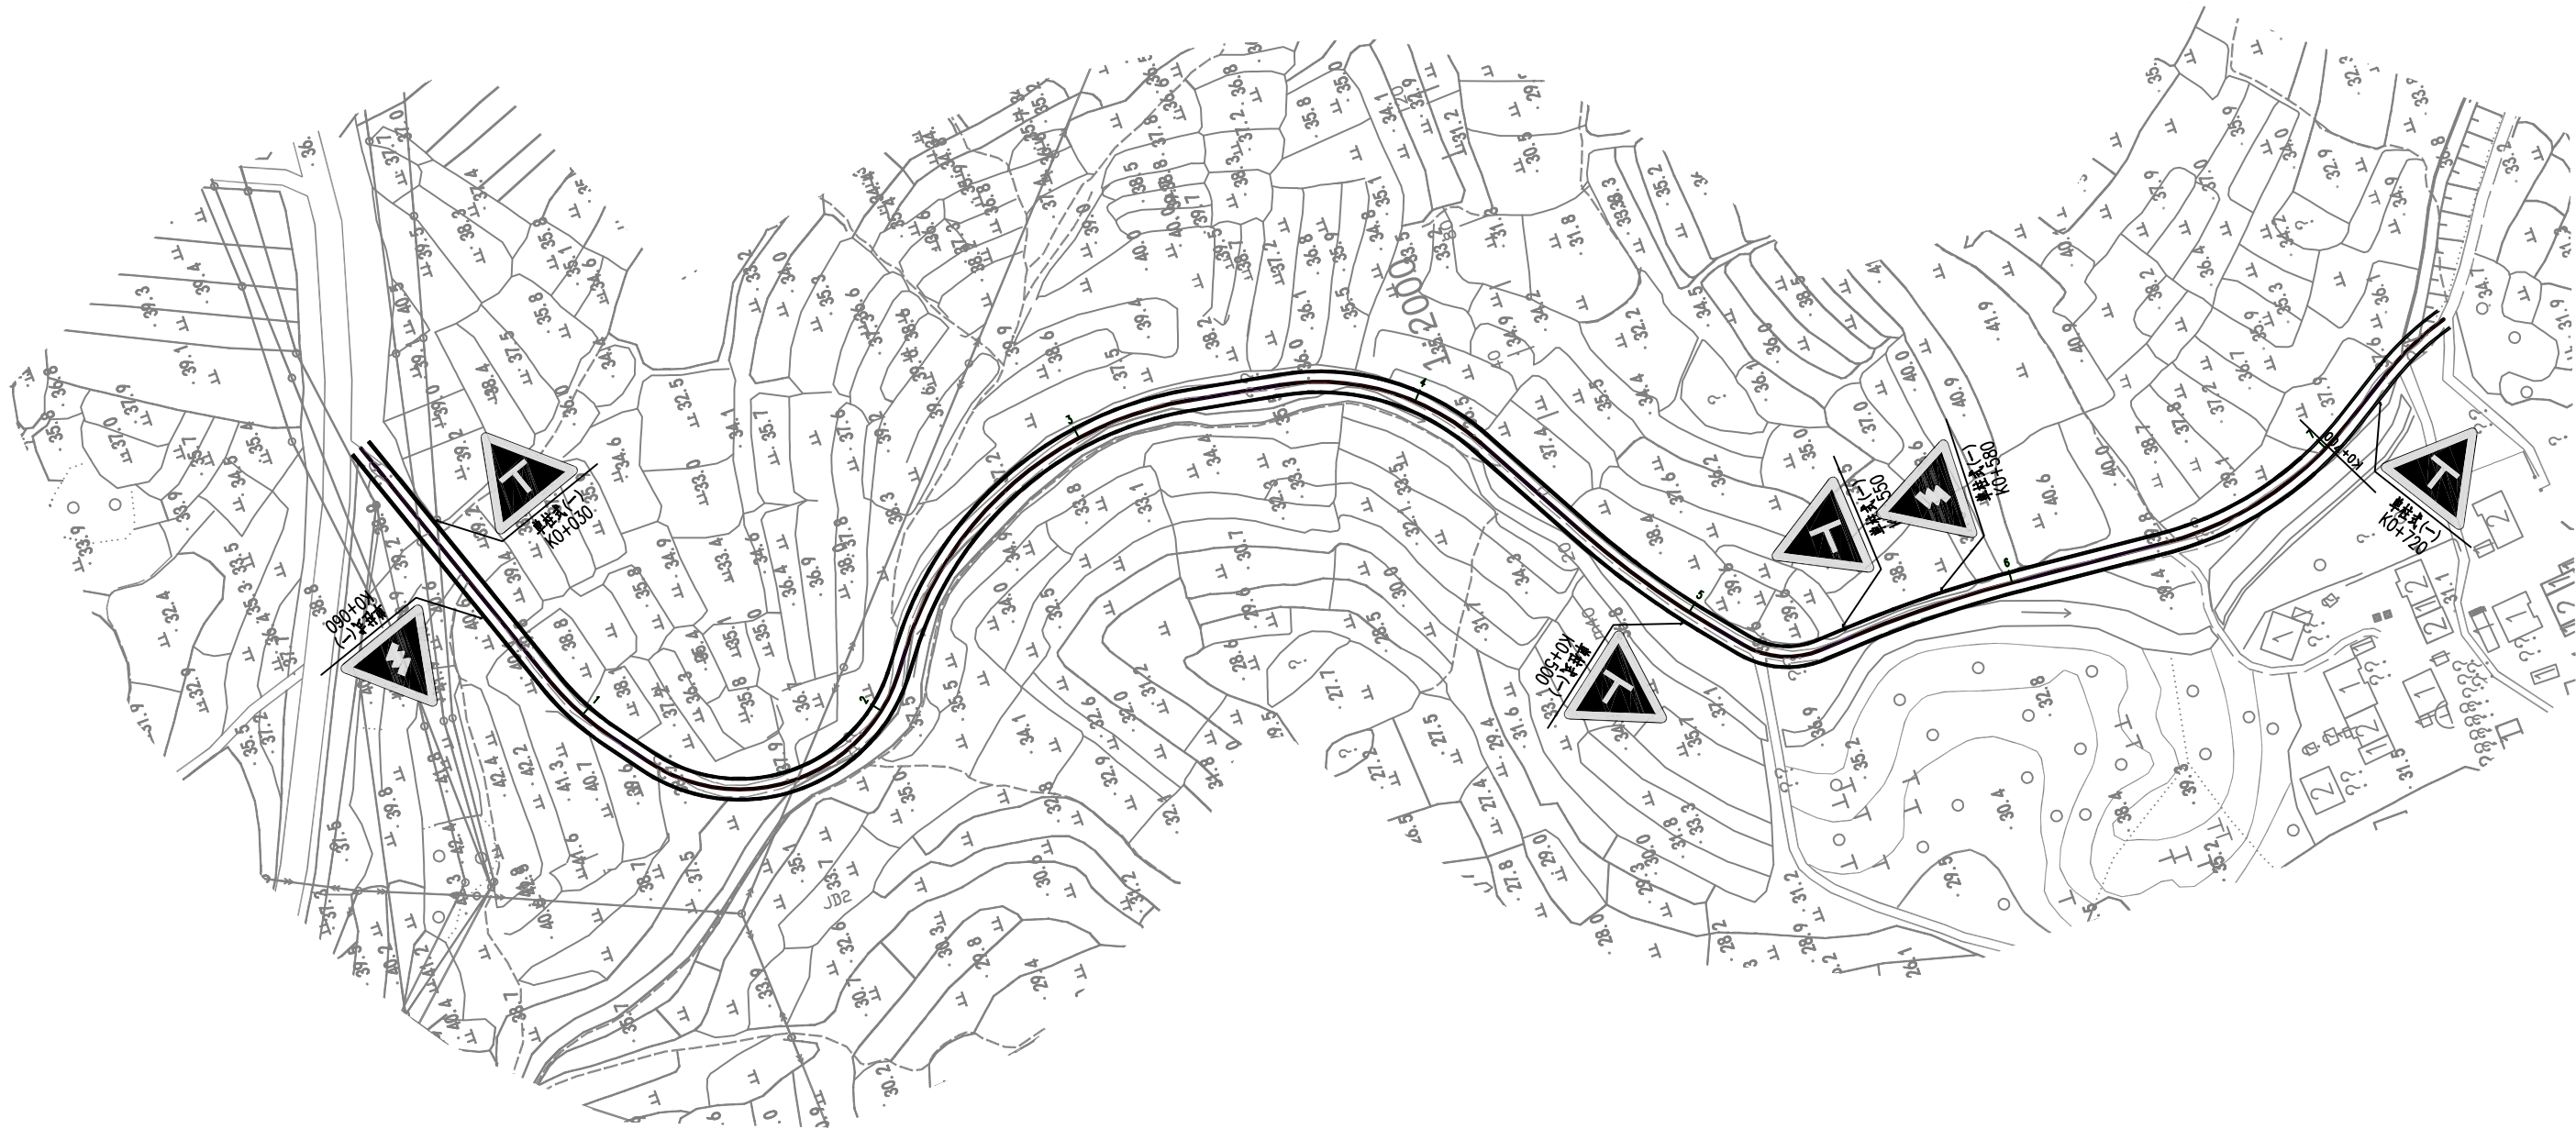

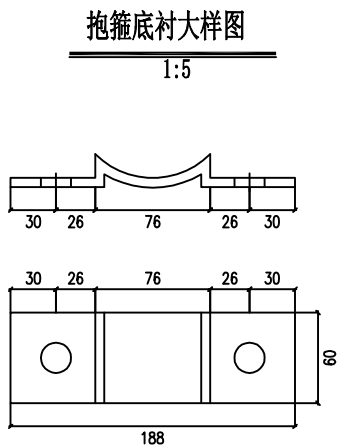
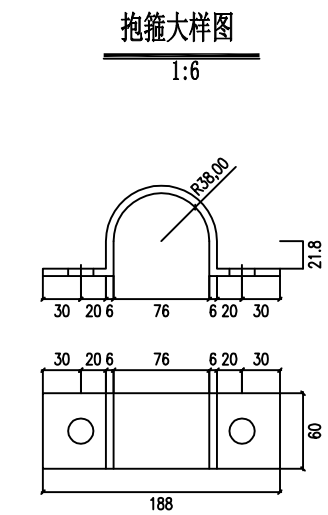
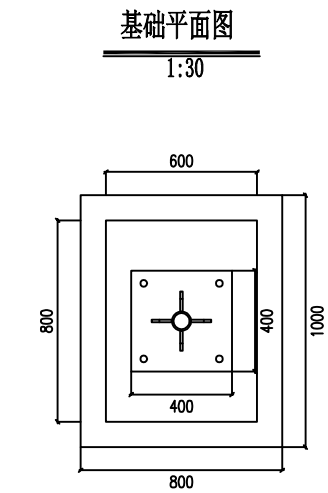


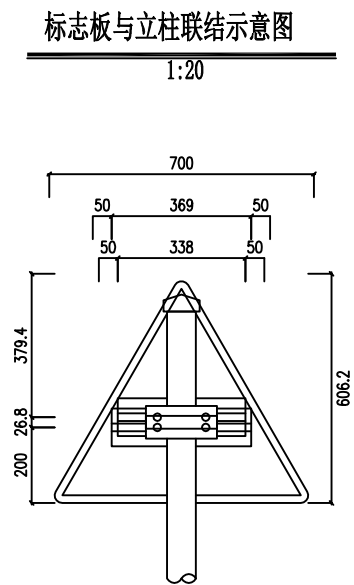









交通标志一览表

序号	位置(桩号)			标志名称 (类型)	标志内容	标志编号 (国标编号)	版面尺寸 (厘米)	反光要求	支撑形式	备注
	桩号	左侧	右侧							
1	K0+030	左侧		交叉路口(g)		警1	A=70	IV类	单柱式(一)	黄底, 黑边, 黑图形
2	K0+060		右侧	连续弯路		警4	A=70	IV类	单柱式(一)	黄底, 黑边, 黑图形
3	K0+500		右侧	交叉路口(i)		警1	A=70	IV类	单柱式(一)	黄底, 黑边, 黑图形
4	K0+550	左侧		交叉路口(h)		警1	A=70	IV类	单柱式(一)	黄底, 黑边, 黑图形
5	K0+580	左侧		连续弯路		警4	A=70	IV类	单柱式(一)	黄底, 黑边, 黑图形
6	K0+720		右侧	交叉路口(g)		警1	A=70	IV类	单柱式(一)	黄底, 黑边, 黑图形

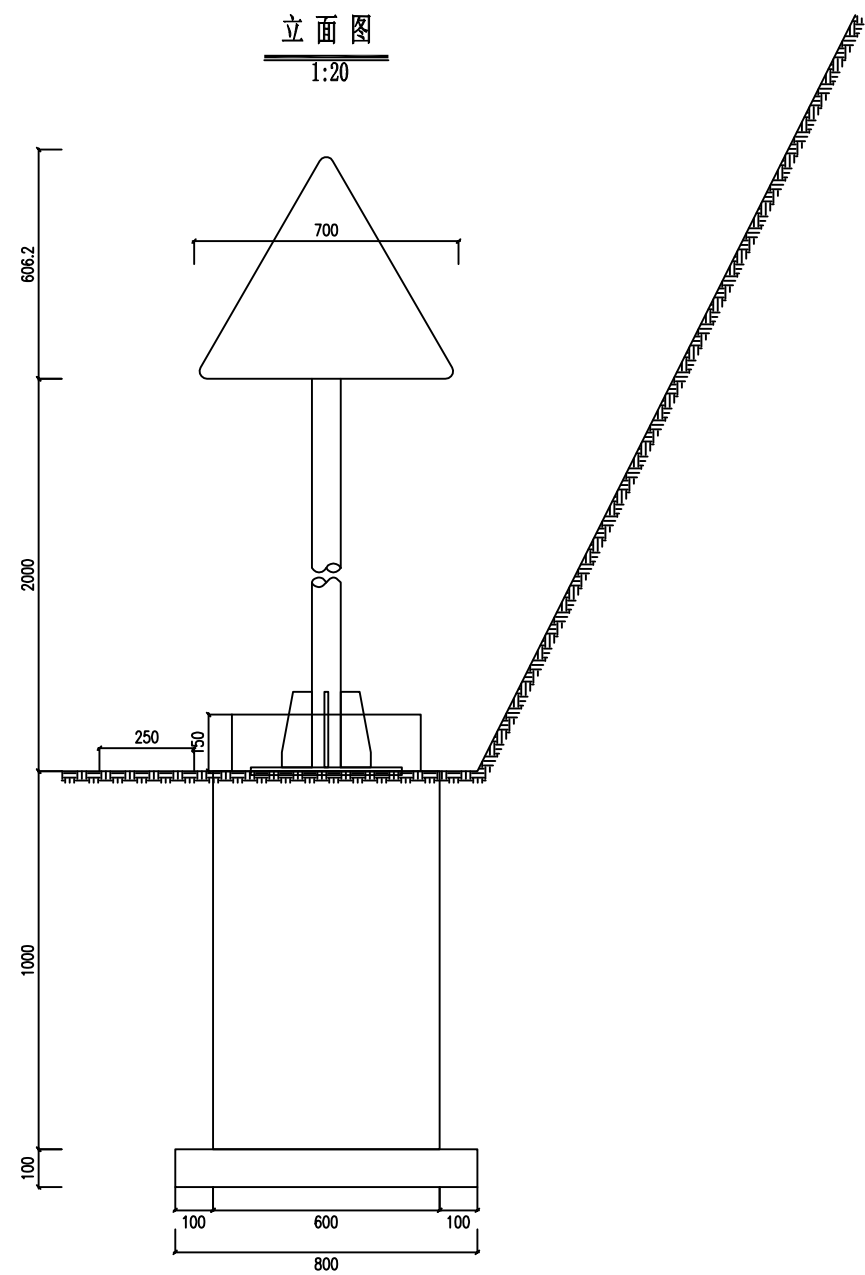

标志材料数量表

材料名称	规格(mm)	单件重(Kg)	件数(件)	重量(Kg)	备注
标志板	700×3	1.782	1	1.782	铝合金板
反光膜	IV类	0.339 (平方米)			IV类
滑动槽钢	100×30×4×338	0.767	1	0.767	铝合金
	100×30×4×369	0.837	1	0.837	铝合金
抱箍	60×6×262.881	0.743	2	1.486	钢板
抱箍底衬	60×6×184.21	0.521	2	1.041	钢板
连接螺栓	M20×100	0.304	4	1.216	六角螺栓
螺母	M20	0.062	4	0.248	六角螺母
垫圈	20	0.025	4	0.099	平垫圈
立柱	Φ76×6×2510	26.004	1	26.004	热轧无缝钢管
柱帽	Φ76	0.716	1	0.716	钢材

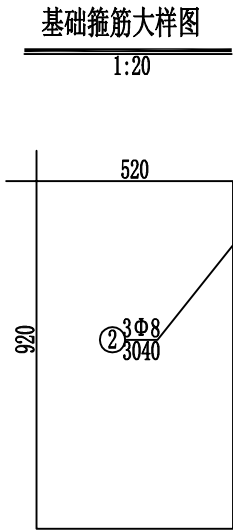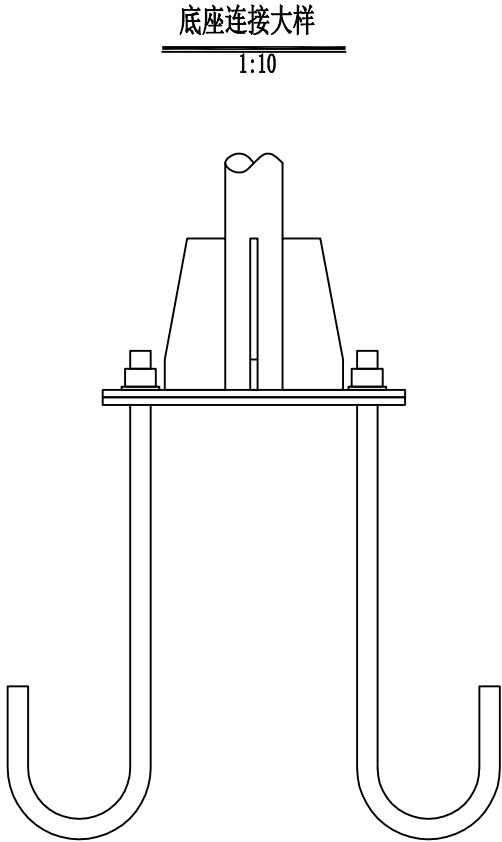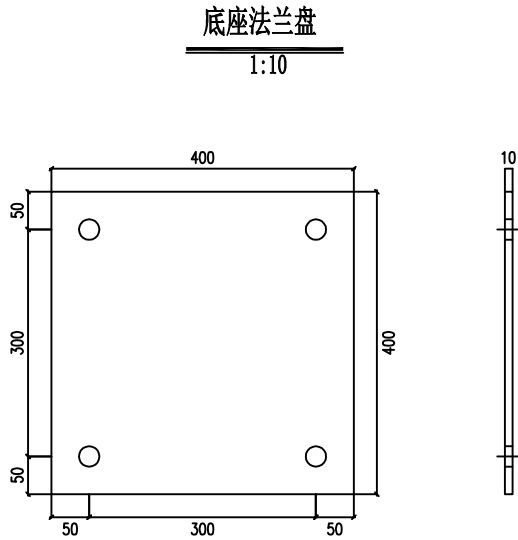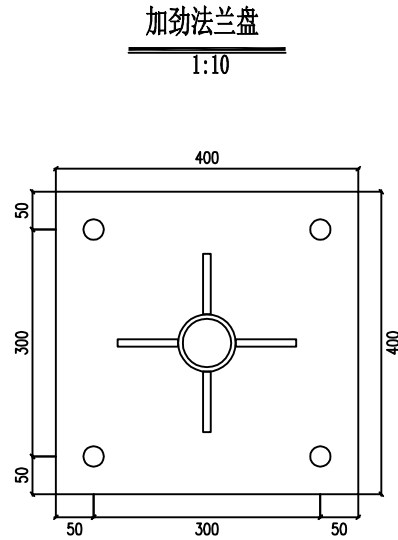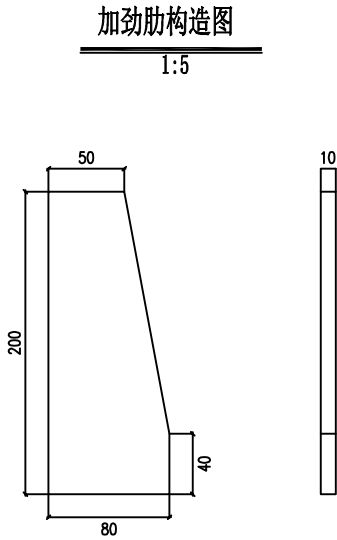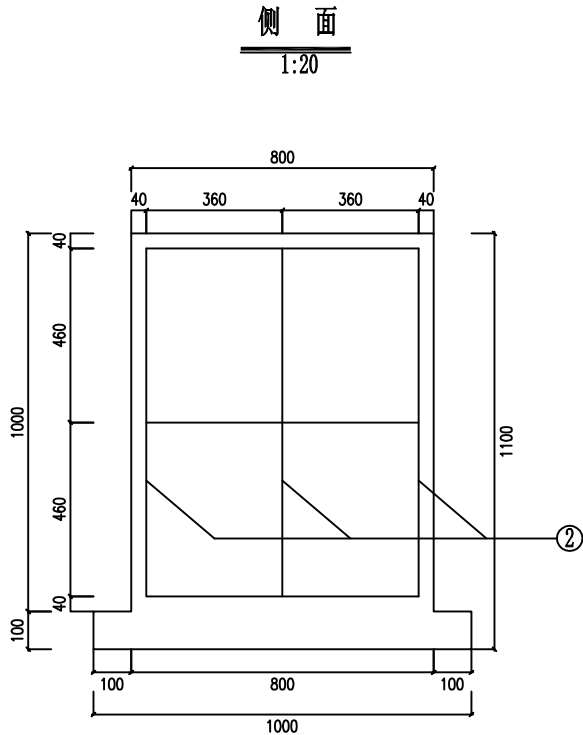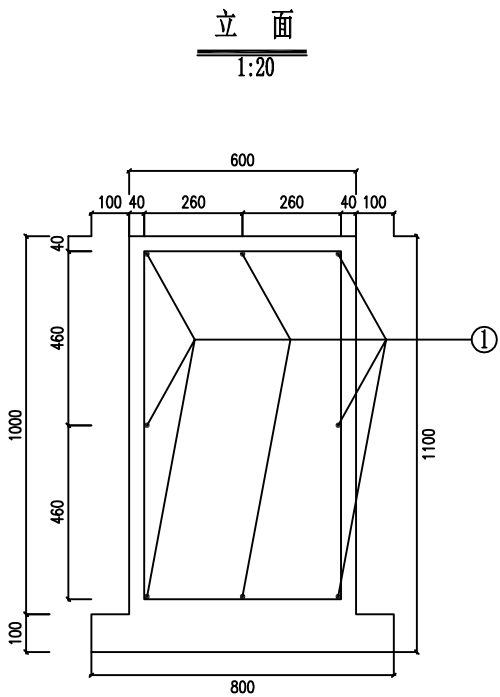


标志材料数量表

材料名称	规格(mm)	单件重(Kg)	件数(件)	重量(Kg)	备注
基础法兰盘	400×400×10	12.56	1	12.56	钢板
基础加劲法兰盘	400×400×10	12.56	1	12.56	钢板
基础加劲肋	高200mm	1.068	4	4.27	钢板
地脚螺栓	M27×500	3.382	4	13.53	U型地脚螺栓
螺母	M27	0.168	4	0.672	六角螺母
垫圈	27	0.053	4	0.211	平垫圈
钢筋	Φ14×842.832	1.02	8	8.159	HRB400
钢筋	Φ8×3040	1.201	3	3.602	HPB300
基础	600×800×1000	0.48 (立方米)			C25
垫层	800×1000×100	0.08 (立方米)			碎石


滑动螺栓大样

1:2

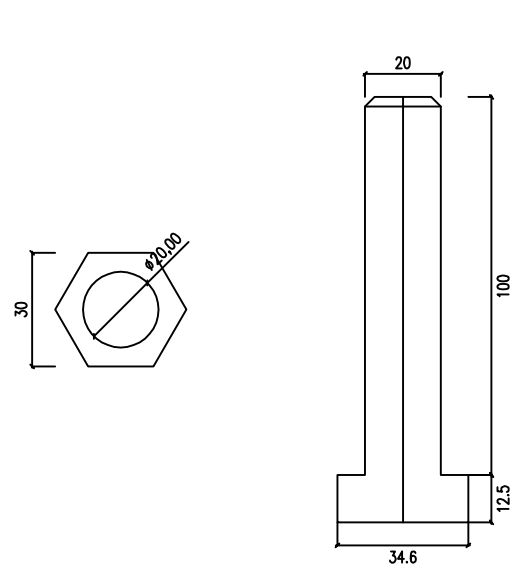


滑动螺母大样图

1:2

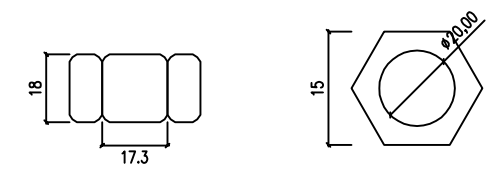


垫片大样图

1:2

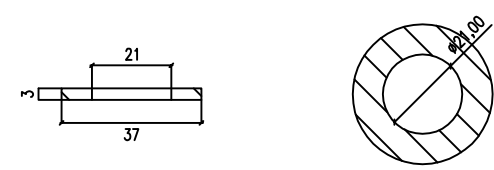


滑动槽钢大样图

1:2

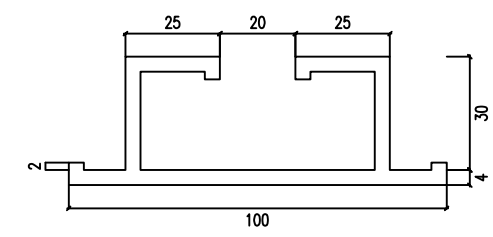


滑动槽钢连接图

1:2

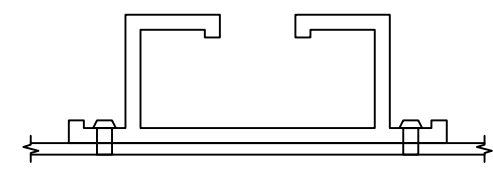


柱帽大样图

1:2

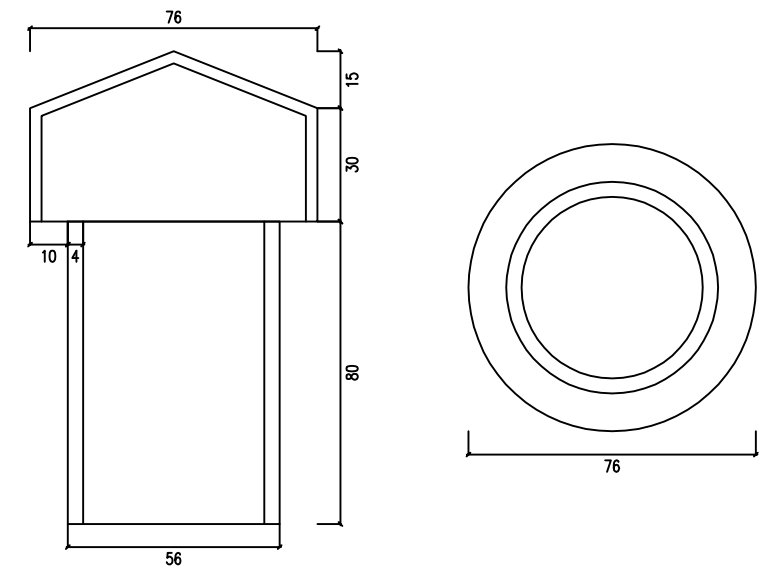


地脚螺栓大样图


1:20



三角形、矩形标志卷边大样

1:2

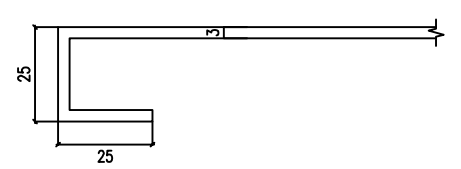

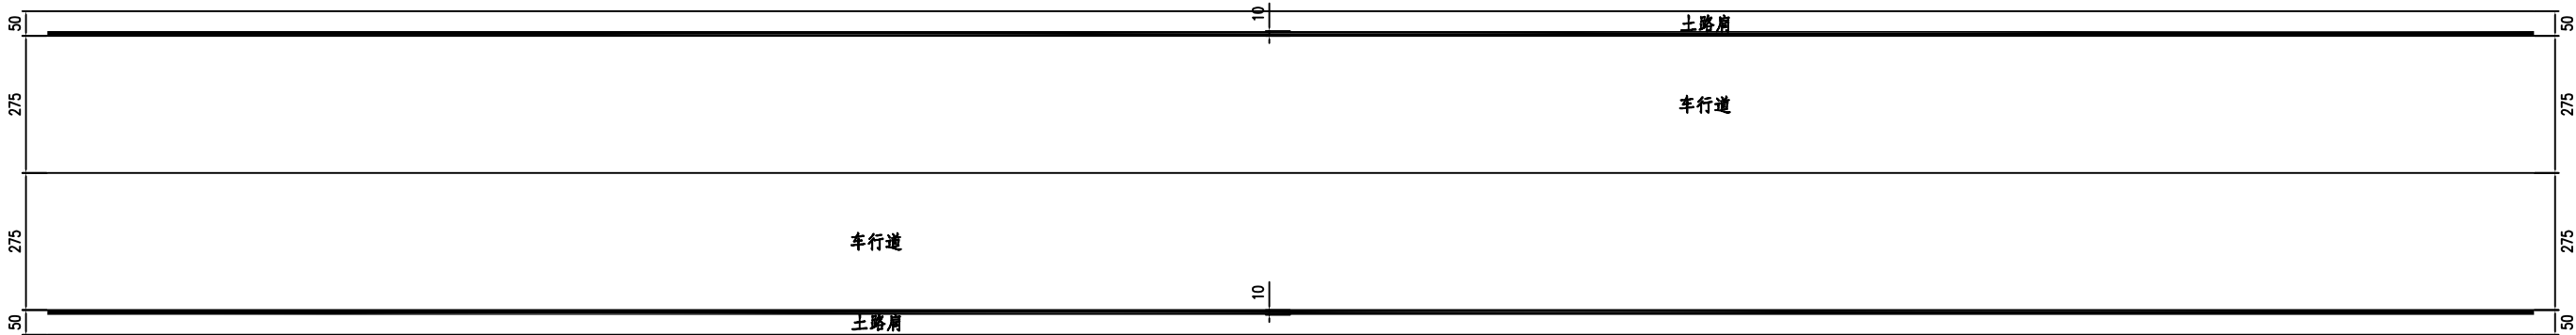

说明:
1. 本图尺寸除注明者外, 其余均以cm为单位。
2. 施工设置时应参照中华人民共和国国家标准《道路交通标志和标线》